

Linear guide rail systems

Steel / Stainless Steel, with interior travel path

SPECIFICATION

Types

- Type **A3**: with one cam roller carriage with 3 rollers
- Type **A5**: with one cam roller carriage with 5 rollers
- Type **B3**: with two cam roller carriages with 3 rollers
- Type **B5**: with two cam roller carriages with 5 rollers

Identification no.

- No. **0**: without end stop
- No. **1**: with one end stop
- No. **2**: with two end stops

Guide rail

- Steel **ZB**
- zinc plated, blue passivated
- Stainless Steel **NI**
- German Material No. 1.4016, blank

Cam roller carriage

- Base body
- Stainless Steel AISI 304
- Roller
- ball-bearing, 2RS
- Stainless Steel, German Material No. 1.4125
- Roller bearing grease
- FDA compliant, class H1
- permanent lubrication

End stop

Stainless Steel AISI 304


Operating temperature -20 °C to 100 °C

INFORMATION


Linear guide rail systems GN 1490 are generally installed in pairs, with a horizontal alignment, either vertically (as shown) or perpendicularly. They are used where simple, linear movements must be executed, such as in automation or in vehicle or machine engineering. Optimal travel properties combined with low maintenance requirements can be achieved in connection with cam roller carriages matched to the guide rails without any play. The system is ready for use immediately after insertion of the cam roller carriages. The linear guide rail systems consist of a guide rail, one or two cam roller carriages and the selected number of end stops. The parts are delivered unassembled. The guide rail can be installed on either the left or right side of the application. During installation of the cam roller carriages, the direction in which the load is received (marking notch) must be taken into account. The lubrication and maintenance instructions must be followed.

ON REQUEST

- other guide rail length (up to 3,994 mm)
- other hole spacing
- other mounting type / finish

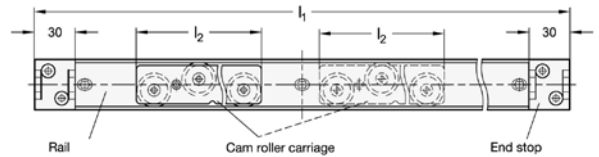


Installation space
15 +0.2 / +0.5




Mounting screws,
guide rail
M5




Load capacity per
cam roller carriage




Rail




Cam roller carriage




Type A3 / B3




Type A5 / B5



Marking notch for
load receiving side




End stop




* Complete with material of the Linear guide rail systems (ZB or NI)

ZB Steel
NI Stainless Steel

GN 1490

Description	h1	l1 ±1	b	h2	l2 cam roller carriage	F _r per cam roller carriage in N	F _A per cam roller carriage in N	
GN 1490-29-394-A3-0-*	29	394	29	23	92	425	175	287
GN 1490-29-394-A5-0-*	29	394	29	23	158	650	350	337
GN 1490-29-394-B3-0-*	29	394	29	23	92	425	175	377
GN 1490-29-394-B5-0-*	29	394	29	23	158	650	350	477
GN 1490-29-394-A3-1-*	29	394	29	23	92	425	175	317
GN 1490-29-394-A5-1-*	29	394	29	23	158	650	350	367
GN 1490-29-394-B3-1-*	29	394	29	23	92	425	175	407
GN 1490-29-394-B5-1-*	29	394	29	23	158	650	350	507
GN 1490-29-394-A3-2-*	29	394	29	23	92	425	175	347
GN 1490-29-394-A5-2-*	29	394	29	23	158	650	350	397
GN 1490-29-394-B3-2-*	29	394	29	23	92	425	175	437
GN 1490-29-394-B5-2-*	29	394	29	23	158	650	350	537
GN 1490-29-474-A3-0-*	29	474	29	23	92	425	175	327
GN 1490-29-474-A5-0-*	29	474	29	23	158	650	350	377
GN 1490-29-474-B3-0-*	29	474	29	23	92	425	175	417
GN 1490-29-474-B5-0-*	29	474	29	23	158	650	350	517
GN 1490-29-474-A3-1-*	29	474	29	23	92	425	175	357
GN 1490-29-474-A5-1-*	29	474	29	23	158	650	350	407
GN 1490-29-474-B3-1-*	29	474	29	23	92	425	175	447
GN 1490-29-474-B5-1-*	29	474	29	23	158	650	350	547
GN 1490-29-474-A3-2-*	29	474	29	23	92	425	175	387
GN 1490-29-474-A5-2-*	29	474	29	23	158	650	350	422
GN 1490-29-474-B3-2-*	29	474	29	23	92	425	175	457
GN 1490-29-474-B5-2-*	29	474	29	23	158	650	350	577
GN 1490-29-554-A3-0-*	29	554	29	23	92	425	175	367
GN 1490-29-554-A5-0-*	29	554	29	23	158	650	350	417
GN 1490-29-554-B3-0-*	29	554	29	23	92	425	175	457
GN 1490-29-554-B5-0-*	29	554	29	23	158	650	350	557
GN 1490-29-554-A3-1-*	29	554	29	23	92	425	175	397
GN 1490-29-554-A5-1-*	29	554	29	23	158	650	350	447
GN 1490-29-554-B3-1-*	29	554	29	23	92	425	175	487
GN 1490-29-554-B5-1-*	29	554	29	23	158	650	350	587
GN 1490-29-554-A3-2-*	29	554	29	23	92	425	175	427
GN 1490-29-554-A5-2-*	29	554	29	23	158	650	350	477
GN 1490-29-554-B3-2-*	29	554	29	23	92	425	175	517
GN 1490-29-554-B5-2-*	29	554	29	23	158	650	350	617
GN 1490-29-634-A3-0-*	29	634	29	23	92	425	175	407
GN 1490-29-634-A5-0-*	29	634	29	23	158	650	350	457
GN 1490-29-634-B3-0-*	29	634	29	23	92	425	175	497
GN 1490-29-634-B5-0-*	29	634	29	23	158	650	350	597
GN 1490-29-634-A3-1-*	29	634	29	23	92	425	175	437
GN 1490-29-634-A5-1-*	29	634	29	23	158	650	350	487
GN 1490-29-634-B3-1-*	29	634	29	23	92	425	175	527
GN 1490-29-634-B5-1-*	29	634	29	23	158	650	350	627
GN 1490-29-634-A3-2-*	29	634	29	23	92	425	175	467
GN 1490-29-634-A5-2-*	29	634	29	23	158	650	350	517
GN 1490-29-634-B3-2-*	29	634	29	23	92	425	175	557
GN 1490-29-634-B5-2-*	29	634	29	23	158	650	350	657
GN 1490-29-714-A3-0-*	29	714	29	23	92	425	175	447
GN 1490-29-714-A5-0-*	29	714	29	23	158	650	350	497
GN 1490-29-714-B3-0-*	29	714	29	23	92	425	175	537
GN 1490-29-714-B5-0-*	29	714	29	23	158	650	350	637
GN 1490-29-714-A3-1-*	29	714	29	23	92	425	175	477
GN 1490-29-714-A5-1-*	29	714	29	23	158	650	350	527
GN 1490-29-714-B3-1-*	29	714	29	23	92	425	175	567
GN 1490-29-714-B5-1-*	29	714	29	23	158	650	350	667
GN 1490-29-714-A3-2-*	29	714	29	23	92	425	175	507
GN 1490-29-714-A5-2-*	29	714	29	23	158	650	350	557

Description	h1	l1 ±1	b	h2	l2 cam roller carriage	F _r per cam roller carriage in N	F _A per cam roller carriage in N	
GN 1490-29-714-B3-2-*	29	714	29	23	92	425	175	597
GN 1490-29-714-B5-2-*	29	714	29	23	158	650	350	697
GN 1490-29-794-A3-0-*	29	794	29	23	92	425	175	487
GN 1490-29-794-A5-0-*	29	794	29	23	158	650	350	537
GN 1490-29-794-B3-0-*	29	794	29	23	92	425	175	577
GN 1490-29-794-B5-0-*	29	794	29	23	158	650	350	677
GN 1490-29-794-A3-1-*	29	794	29	23	92	425	175	517
GN 1490-29-794-A5-1-*	29	794	29	23	158	650	350	567
GN 1490-29-794-B3-1-*	29	794	29	23	92	425	175	607
GN 1490-29-794-B5-1-*	29	794	29	23	158	650	350	707
GN 1490-29-794-A3-2-*	29	794	29	23	92	425	175	547
GN 1490-29-794-A5-2-*	29	794	29	23	158	650	350	597
GN 1490-29-794-B3-2-*	29	794	29	23	92	425	175	637
GN 1490-29-794-B5-2-*	29	794	29	23	158	650	350	737
GN 1490-29-874-A3-0-*	29	874	29	23	92	425	175	527
GN 1490-29-874-A5-0-*	29	874	29	23	158	650	350	577
GN 1490-29-874-B3-0-*	29	874	29	23	92	425	175	617
GN 1490-29-874-B5-0-*	29	874	29	23	158	650	350	717
GN 1490-29-874-A3-1-*	29	874	29	23	92	425	175	557
GN 1490-29-874-A5-1-*	29	874	29	23	158	650	350	607
GN 1490-29-874-B3-1-*	29	874	29	23	92	425	175	647
GN 1490-29-874-B5-1-*	29	874	29	23	158	650	350	747
GN 1490-29-874-A3-2-*	29	874	29	23	92	425	175	587
GN 1490-29-874-A5-2-*	29	874	29	23	158	650	350	637
GN 1490-29-874-B3-2-*	29	874	29	23	92	425	175	677
GN 1490-29-874-B5-2-*	29	874	29	23	158	650	350	777
GN 1490-29-954-A3-0-*	29	954	29	23	92	425	175	567
GN 1490-29-954-A5-0-*	29	954	29	23	158	650	350	617
GN 1490-29-954-B3-0-*	29	954	29	23	92	425	175	657
GN 1490-29-954-B5-0-*	29	954	29	23	158	650	350	757
GN 1490-29-954-A3-1-*	29	954	29	23	92	425	175	597
GN 1490-29-954-A5-1-*	29	954	29	23	158	650	350	647
GN 1490-29-954-B3-1-*	29	954	29	23	92	425	175	687
GN 1490-29-954-B5-1-*	29	954	29	23	158	650	350	787
GN 1490-29-954-A3-2-*	29	954	29	23	92	425	175	627
GN 1490-29-954-A5-2-*	29	954	29	23	158	650	350	677
GN 1490-29-954-B3-2-*	29	954	29	23	92	425	175	717
GN 1490-29-954-B5-2-*	29	954	29	23	158	650	350	817
GN 1490-29-1034-A3-0-*	29	1034	29	23	92	425	175	607
GN 1490-29-1034-A5-0-*	29	1034	29	23	158	650	350	657
GN 1490-29-1034-B3-0-*	29	1034	29	23	92	425	175	697
GN 1490-29-1034-B5-0-*	29	1034	29	23	158	650	350	797
GN 1490-29-1034-A3-1-*	29	1034	29	23	92	425	175	637
GN 1490-29-1034-A5-1-*	29	1034	29	23	158	650	350	687
GN 1490-29-1034-B3-1-*	29	1034	29	23	92	425	175	727
GN 1490-29-1034-B5-1-*	29	1034	29	23	158	650	350	827
GN 1490-29-1034-A3-2-*	29	1034	29	23	92	425	175	667
GN 1490-29-1034-A5-2-*	29	1034	29	23	158	650	350	717
GN 1490-29-1034-B3-2-*	29	1034	29	23	92	425	175	757
GN 1490-29-1034-B5-2-*	29	1034	29	23	158	650	350	857
GN 1490-29-1194-A3-0-*	29	1194	29	23	92	425	175	687
GN 1490-29-1194-A5-0-*	29	1194	29	23	158	650	350	737
GN 1490-29-1194-B3-0-*	29	1194	29	23	92	425	175	777
GN 1490-29-1194-B5-0-*	29	1194	29	23	158	650	350	877
GN 1490-29-1194-A3-1-*	29	1194	29	23	92	425	175	717
GN 1490-29-1194-A5-1-*	29	1194	29	23	158	650	350	767
GN 1490-29-1194-B3-1-*	29	1194	29	23	92	425	175	807
GN 1490-29-1194-B5-1-*	29	1194	29	23	158	650	350	907
GN 1490-29-1194-A3-2-*	29	1194	29	23	92	425	175	747
GN 1490-29-1194-A5-2-*	29	1194	29	23	158	650	350	797
GN 1490-29-1194-B3-2-*	29	1194	29	23	92	425	175	837
GN 1490-29-1194-B5-2-*	29	1194	29	23	158	650	350	937
GN 1490-29-1434-A3-0-*	29	1434	29	23	92	425	175	807

Weight ZB




Control elements

* Complete with material of the Linear guide rail systems (ZB or NI)

ZB Steel NI Stainless Steel

Description	h1	l1 ±1	b	h2	l2 cam roller carriage	F _R per cam roller carriage in N	F _A per cam roller carriage in N	⚖
GN 1490-29-1434-A5-0-*	29	1434	29	23	158	650	350	857
GN 1490-29-1434-B3-0-*	29	1434	29	23	92	425	175	897
GN 1490-29-1434-B5-0-*	29	1434	29	23	158	650	350	997
GN 1490-29-1434-A3-1-*	29	1434	29	23	92	425	175	837
GN 1490-29-1434-A5-1-*	29	1434	29	23	158	650	350	887
GN 1490-29-1434-B3-1-*	29	1434	29	23	92	425	175	927
GN 1490-29-1434-B5-1-*	29	1434	29	23	158	650	350	1027
GN 1490-29-1434-A3-2-*	29	1434	29	23	92	425	175	867
GN 1490-29-1434-A5-2-*	29	1434	29	23	158	650	350	917
GN 1490-29-1434-B3-2-*	29	1434	29	23	92	425	175	957
GN 1490-29-1434-B5-2-*	29	1434	29	23	158	650	350	1057
GN 1490-37-394-A3-0-*	37	394	37	30	92	425	175	409
GN 1490-37-394-A5-0-*	37	394	37	30	158	650	350	479
GN 1490-37-394-B3-0-*	37	394	37	30	92	425	175	519
GN 1490-37-394-B5-0-*	37	394	37	30	158	650	350	659
GN 1490-37-394-A3-1-*	37	394	37	30	92	425	175	449
GN 1490-37-394-A5-1-*	37	394	37	30	158	650	350	519
GN 1490-37-394-B3-1-*	37	394	37	30	92	425	175	559
GN 1490-37-394-B5-1-*	37	394	37	30	158	650	350	699
GN 1490-37-394-A3-2-*	37	394	37	30	92	425	175	489
GN 1490-37-394-A5-2-*	37	394	37	30	158	650	350	559
GN 1490-37-394-B3-2-*	37	394	37	30	92	425	175	599
GN 1490-37-394-B5-2-*	37	394	37	30	158	650	350	739
GN 1490-37-474-A3-0-*	37	474	37	30	92	425	175	470
GN 1490-37-474-A5-0-*	37	474	37	30	158	650	350	540
GN 1490-37-474-B3-0-*	37	474	37	30	92	425	175	580
GN 1490-37-474-B5-0-*	37	474	37	30	158	650	350	720
GN 1490-37-474-A3-1-*	37	474	37	30	92	425	175	510
GN 1490-37-474-A5-1-*	37	474	37	30	158	650	350	580
GN 1490-37-474-B3-1-*	37	474	37	30	92	425	175	620
GN 1490-37-474-B5-1-*	37	474	37	30	158	650	350	760
GN 1490-37-474-A3-2-*	37	474	37	30	92	425	175	550
GN 1490-37-474-A5-2-*	37	474	37	30	158	650	350	620
GN 1490-37-474-B3-2-*	37	474	37	30	92	425	175	660
GN 1490-37-474-B5-2-*	37	474	37	30	158	650	350	800
GN 1490-37-554-A3-0-*	37	554	37	30	92	425	175	531
GN 1490-37-554-A5-0-*	37	554	37	30	158	650	350	601
GN 1490-37-554-B3-0-*	37	554	37	30	92	425	175	641
GN 1490-37-554-B5-0-*	37	554	37	30	158	650	350	781
GN 1490-37-554-A3-1-*	37	554	37	30	92	425	175	571
GN 1490-37-554-A5-1-*	37	554	37	30	158	650	350	641
GN 1490-37-554-B3-1-*	37	554	37	30	92	425	175	681
GN 1490-37-554-B5-1-*	37	554	37	30	158	650	350	821
GN 1490-37-554-A3-2-*	37	554	37	30	92	425	175	611
GN 1490-37-554-A5-2-*	37	554	37	30	158	650	350	681
GN 1490-37-554-B3-2-*	37	554	37	30	92	425	175	721
GN 1490-37-554-B5-2-*	37	554	37	30	158	650	350	861
GN 1490-37-634-A3-0-*	37	634	37	30	92	425	175	591
GN 1490-37-634-A5-0-*	37	634	37	30	158	650	350	661
GN 1490-37-634-B3-0-*	37	634	37	30	92	425	175	701
GN 1490-37-634-B5-0-*	37	634	37	30	158	650	350	841
GN 1490-37-634-A3-1-*	37	634	37	30	92	425	175	631
GN 1490-37-634-A5-1-*	37	634	37	30	158	650	350	701
GN 1490-37-634-B3-1-*	37	634	37	30	92	425	175	741
GN 1490-37-634-B5-1-*	37	634	37	30	158	650	350	881
GN 1490-37-634-A3-2-*	37	634	37	30	92	425	175	671
GN 1490-37-634-A5-2-*	37	634	37	30	158	650	350	741
GN 1490-37-634-B3-2-*	37	634	37	30	92	425	175	781
GN 1490-37-634-B5-2-*	37	634	37	30	158	650	350	921

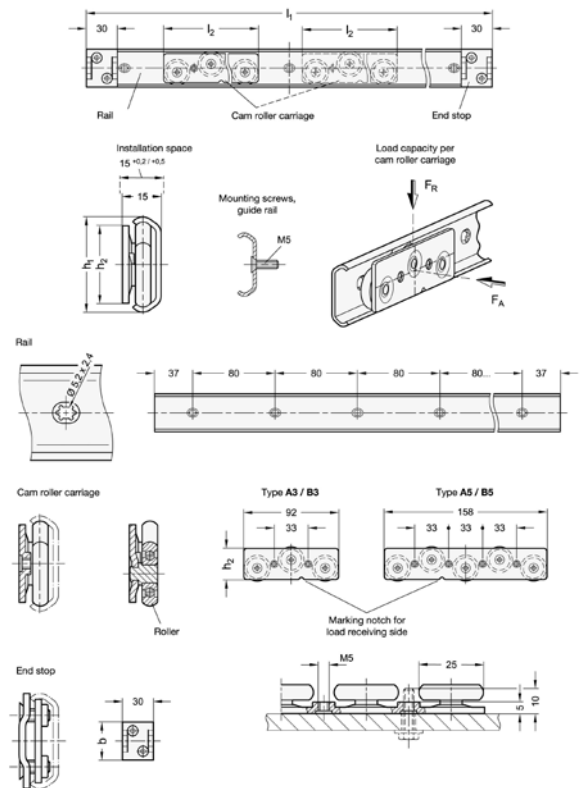

Description	h1	l1 ±1	b	h2	l2 cam roller carriage	F _R per cam roller carriage in N	F _A per cam roller carriage in N	⚖
GN 1490-37-714-A3-0-*	37	714	37	30	92	425	175	652
GN 1490-37-714-A5-0-*	37	714	37	30	158	650	350	722
GN 1490-37-714-B3-0-*	37	714	37	30	92	425	175	762
GN 1490-37-714-B5-0-*	37	714	37	30	158	650	350	902
GN 1490-37-714-A3-1-*	37	714	37	30	92	425	175	692
GN 1490-37-714-A5-1-*	37	714	37	30	158	650	350	762
GN 1490-37-714-B3-1-*	37	714	37	30	92	425	175	802
GN 1490-37-714-B5-1-*	37	714	37	30	158	650	350	942
GN 1490-37-714-A3-2-*	37	714	37	30	92	425	175	732
GN 1490-37-714-A5-2-*	37	714	37	30	158	650	350	802
GN 1490-37-714-B3-2-*	37	714	37	30	92	425	175	842
GN 1490-37-714-B5-2-*	37	714	37	30	158	650	350	982
GN 1490-37-794-A3-0-*	37	794	37	30	92	425	175	713
GN 1490-37-794-A5-0-*	37	794	37	30	158	650	350	783
GN 1490-37-794-B3-0-*	37	794	37	30	92	425	175	823
GN 1490-37-794-B5-0-*	37	794	37	30	158	650	350	963
GN 1490-37-794-A3-1-*	37	794	37	30	92	425	175	753
GN 1490-37-794-A5-1-*	37	794	37	30	158	650	350	823
GN 1490-37-794-B3-1-*	37	794	37	30	92	425	175	863
GN 1490-37-794-B5-1-*	37	794	37	30	158	650	350	1003
GN 1490-37-794-A3-2-*	37	794	37	30	92	425	175	793
GN 1490-37-794-A5-2-*	37	794	37	30	158	650	350	863
GN 1490-37-794-B3-2-*	37	794	37	30	92	425	175	903
GN 1490-37-794-B5-2-*	37	794	37	30	158	650	350	1043
GN 1490-37-634-A5-2-*	37	634	37	30	158	650	350	741
GN 1490-37-634-B3-2-*	37	634	37	30	92	425	175	781
GN 1490-37-634-B5-2-*	37	634	37	30	158	650	350	921

Weight ZB



Control elements 6

