

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

## UC-RF antenna extensions

with SMA connector

### CABLE

Shielded cable with PVC sheath, bend radius in fixed position  $\geq 50$  mm.

### CONNECTORS


Male and female SMA connectors.

### SPECIAL EXECUTIONS ON REQUEST

Extensions with cables in different lengths.



Mechanical and electrical characteristics	
Impedance	50 Ohm
Working temperature	-40 °C ÷ 70 °C

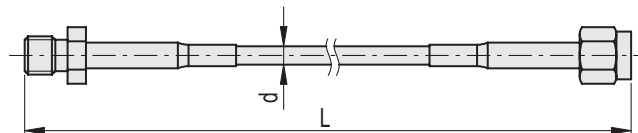

Code	Description	L+50	d±0.5	⚖️
CE.99253	FC-UC-1.0	1000	3	48
CE.99255	FC-UC-2.5	2500	5	106
CE.99257	FC-UC-5.0	5000	5	208
CE.99259	FC-UC-10.0	10000	5	206

Position indicators 7